The Wedgelock

HYDRAULIC QUICK COUPLER

130-450 WEIGHT CLASSES

Instant Safety

Dual-Locking

Easy Installation

Multi-Model Pickup

Wedgelock

ENGINEERING **EXCELLENCE**

930-000-60 (REV 2)

Certified Lifting Eye

Effective lifting point to move loads within the lift capacity of the excavator

Primary Cylinder

One piece forged-body trunnion-mounted Primary Cylinder rated to mains pressure. Includes a Pilot Operated Safety Check Valve and Cross Port Relief Valve for total cylinder protection

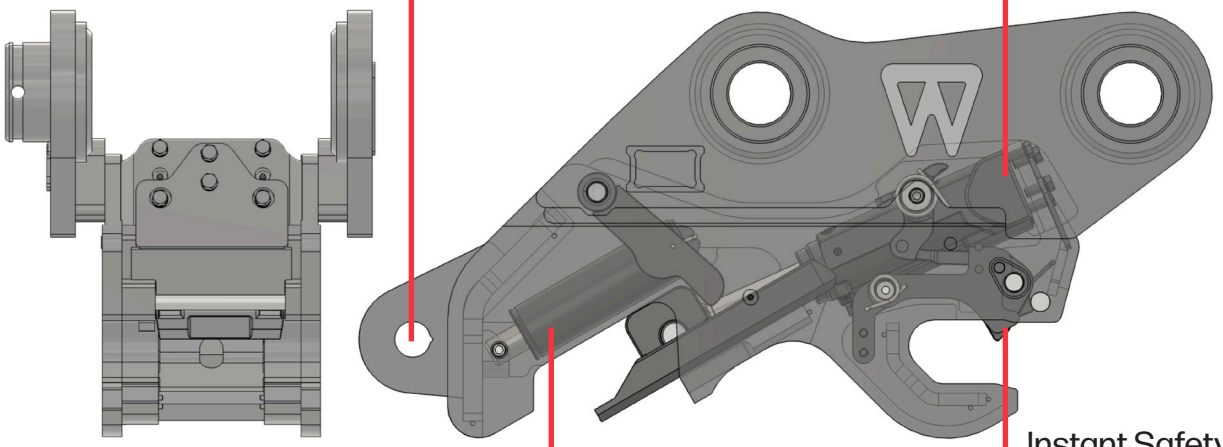

Rear Safety System

Automatically engaged Rear Safety System – retains the attachment in the working position if the engagement force is lost or reduced

Instant Safety

The spring loaded **Safety Knuckle** allows for instant latching and locking of the front pin in the C-section

Technical

WEIGHT CLASS	COUPLER MODEL	CHASSIS SPECS	WEIGHT (KG)	LIFTING EYE WLL (KG)
130	CM6-130	350*420*218*60/65	187	10000
170	CM6-170	386*488* 280*70/80	315	17000
210	CM6-210	386*488* 280*70/80	321	17000
270	CM6-270	440*530*324*80/90	396	17000
320	CM6-320	500*585*344*90/100	543	25000
450	CM6-450	537*591*369*100/110	695	35000

Multi-Model Pickup

WEIGHT CLASS	CASE	CAT	DEVELON	HITACHI	HYUNDAI	JCB	JOHN DEERE	JOHN DEERE (EXOA)	KOBELCO	KOMATSU	SUMITOMO	TAKEUCHI	VOLVO
130	CX130 CX145	311 313 315F	DX140	ZX130 ZX135	R125 R140 R145	JS130 JS140	120 135	E130 E140	SK135 SK140	PC130 PC138	SH130 SH145	TB2150	EC140 EC145
170	CX160	316		ZX160 ZX170	R180	JS160	160		SK170	PC160 PC170	SH180		
210	CX210 CX235	318 320 323 325F B LINKAGE	DX225 DX235	ZX200 ZX225	R210 R235 HX225	JS200 JS235	200 225	E210	SK210 SK225 SK235	PC200 PC210 PC228	SH210 SH235		EC220 ECR235
270	CX250	324 326 330F CB LINKAGE	DX255	ZX240 ZX250 ZX260 ZX290	R250 R290		230 270	E240	SK250 SK260	PC220 PC240 PC270 PC290	SH250 SH300		EC290 EC300
320	CX330 CX350	336 DB LINKAGE	DX300 DX340 DX380	ZX330 ZX350 ZX360	R320 R380 HX300 HX350	JS330 JS360	330 370	E360 E380	SK300 SK330 SK350 SK380	PC300 PC350 PC360	SH350 SH370		
450	CX450 CX490	345 349 TB LINKAGE	DX420 DX480* DX520*	ZX450 ZX490 ZX530	R450 R480 HX500* HX520*	JS450 JS460	450 520			PC450 PC490	SH400 SH450		EC360 EC460 EC480 EC530* EC550*

* Indicates a modification to the attachment pins is required – see Wedgelock for more detail. Use as a guide only – for further information, contact your nearest Wedgelock representative. Specifications are subject to change without notice. All images used are representative only and may differ from actual product.

FULLY COMPLIANT: meets ISO13031-2016, EN474-1, EN474-4, EN474-5 & AS13031-2023 Quick Coupler Safety Standards.

Wedgelock
ENGINEERING EXCELLENCE

New Zealand
All Enquiries 0800 424 482
nzsales@wedgelock.com

Australia
All Enquiries 1800 731 757
aussales@wedgelock.com

www.wedgelock.com