The Wedgelock

HYDRAULIC QUICK COUPLER

320-1250 WEIGHT CLASSES

OEM & Hybrid

Instant Safety

Dual-Locking

Easy Installation

Wedgelock

ENGINEERING **EXCELLENCE**

930-000-70 (REV0)

Certified Lifting Eye

Effective lifting point to move loads within the lift capacity of the excavator

Primary Cylinder

One piece forged-body trunnion-mounted Primary Cylinder rated to mains pressure. Includes a Pilot Operated Safety Check Valve and Cross Port Relief Valve for total cylinder protection

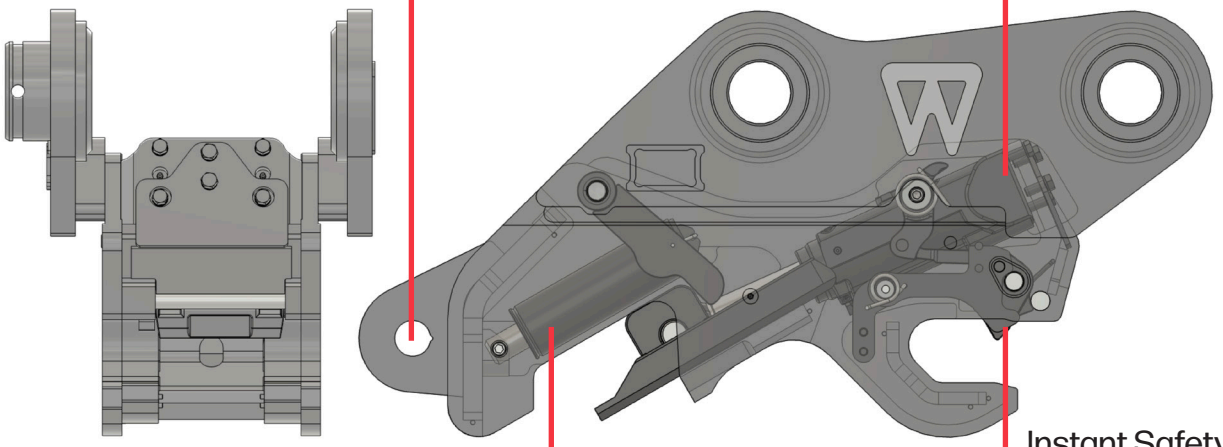

Rear Safety System

Automatically engaged Rear Safety System – retains the attachment in the working position if the engagement force is lost or reduced

Instant Safety

The spring loaded **Safety Knuckle** allows for instant latching and locking of the front pin in the C-section

Wedgelock engineers solutions for extreme scale. We specialise in manufacturing custom OEM and hybrid quick couplers, precisely Engineered to specification to suit the 320 to 1250 weight classes of excavator (32 to 125 tonne). This commitment ensures unparalleled precision, durability, and safety for the most demanding operations globally.

Technical

WEIGHT CLASS	COUPLER MODEL	CHASSIS SPECS	LIFTING EYE WLL (KG)
320	CS-320	OEM / Hybrid	25000
450	CS-450		35000
750	CS-750		42500
950	CS-950		42500
1250	CS-1250		42500

WEIGHT CLASS	CASE	CAT	DEVELON	HITACHI	HYUNDAI	JCB	JOHN DEERE	KOBELCO	KOMATSU	SUMITOMO	VOLVO
320	CX330 CX350	336 DB LINKAGE	DX300 DX340 DX380	ZX330 ZX350 ZX360	R320 R380 HX300 HX350	JS330 JS360	330 370	SK300 SK330 SK350 SK380	PC300 PC350 PC360	SH350 SH370	
450	CX450 CX490	349 350 352 TB LINKAGE	DX420 DX480 DX520	ZX450 ZX490 ZX530	HX480 HX520	JS450 JS460	450 520	SK500	PC450 PC490	SH470 SH510	EC360 EC460 EC480 EC530 EC550
750		374 UB / VB2 LINKAGE		ZX670 ZX690			670		PC600 PC650		EC700 EC750
950	CX800	390 WB2 / HB2 / JC LINKAGE	DX800	ZX870 ZX890	HX800 HX900		870	SK800 SK850	PC850 PC850		EC950
1250			DX1000	EX1200	HX1000 R1250				PC1000 PC1250		

Weight classes and models stipulated are to be used as a guide only. Pricing of hybrid and specific designed couplers are subject to final specification due to potential variations in overall dimensions and weight of the final product. Specifications are subject to change without notice. All images used are representative only and may differ from actual product. For further information, contact your nearest Wedgelock representative.

FULLY COMPLIANT: meets ISO13031-2016, EN474-1, EN474-4, EN474-5 & AS13031-2023 Quick Coupler Safety Standards.

Wedgelock
ENGINEERING EXCELLENCE

New Zealand
All Enquiries 0800 424 482
nzsales@wedgelock.com

Australia
All Enquiries 1800 731 757
aussales@wedgelock.com

www.wedgelock.com