The Wedgelock

HYDRAULIC QUICK COUPLER

037-070 WEIGHT CLASSES

Instant Safety

Dual-Locking

Easy Installation

Multi-Model Pickup

Wedgelock

ENGINEERING **EXCELLENCE**

930-000-62 (REV 2)

Certified Lifting Eye

Effective lifting point to move loads within the lift capacity of the excavator

Primary Cylinder

One piece forged-body primary cylinder includes a Pilot Operated Safety Check Valve and Cross Port Relief Valve for total cylinder protection

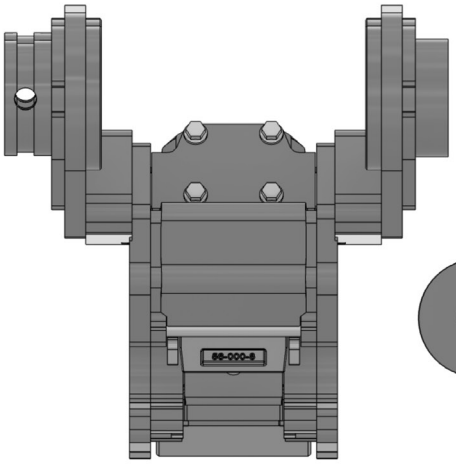

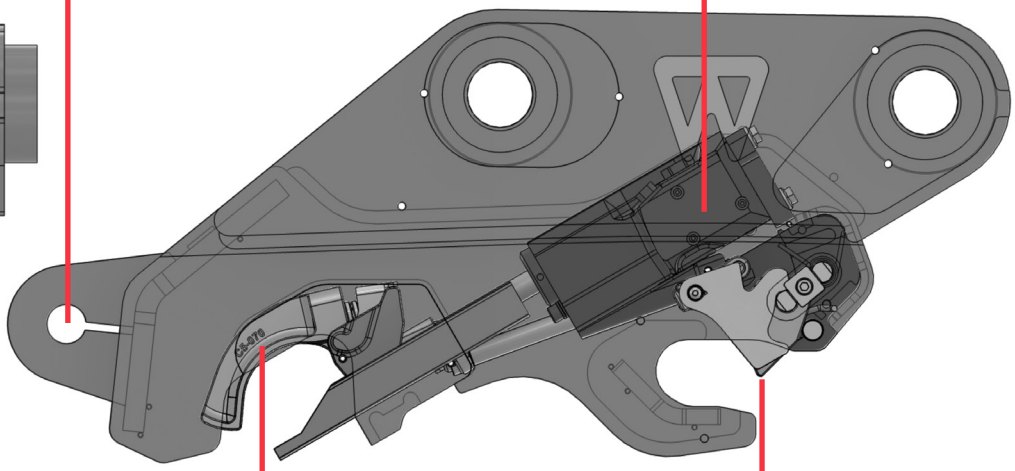

Rear Safety System

Automatically engaged Rear Safety System – retains the attachment in the working position if the engagement force is lost or reduced

Instant Safety

The spring loaded **Safety Knuckle** allows for instant latching and locking of the front pin in the C-section

Technical

WEIGHT CLASS	COUPLER MODEL	CHASSIS SPECS	WEIGHT (KG)	LIFTING EYE WLL (KG)
037	CM5-037	164*217*121*34/40	95	3250
055	CM5-055	218*285*144*45	150	4750
070	CM5-070	289*312*159*50/55/60	195	6500

Multi-Model Pickup

WEIGHT CLASS	AIRMAN	BOBCAT	CASE	CAT	HITACHI	HYUNDAI	JCB	JOHN DEERE	JOHN DEERE (EXOA)	KATO	KOBELCO	KOMATSU	KUBOTA	SUMITOMO	TAKEUCHI	VOLVO	YANMAR
037	AX33 AX38	E35	CX31 CX36	303 304	ZX33 ZX38	R35		35	E36z	HD30 HD35	SK30 SK35	PC30 PC35	U35 KX91 KX121		TB235 TB138 TB240		ViO35
055	AX48 AX55	E45 E50 E63	CX60	305 306	ZX48 ZX55 ZX65	R55 R60	48Z 55Z	50 60	E60	HD45 HD55 HD60	SK55	PC45 PC55	U45 U55 KX161		TB250 TB153 TB260		ViO45 ViO55
070		E85	CX75 CX80	307 308 309	ZX75 ZX85			80 90		HD85	SK75 SK85	PC78 PC88	KX080	SH75 SH80	TB280 TB285	ECR88	ViO80 ViO100

FULLY COMPLIANT: meets ISO13031-2016, EN474-1, EN474-4, EN474-5 & AS13031-2023 Quick Coupler Safety Standards.
Specifications are subject to change without notice. All images used are representative only and may differ from actual product.

Wedgelock
ENGINEERING EXCELLENCE

New Zealand
All Enquiries 0800 424 482
nzsales@wedgelock.com

Australia
All Enquiries 1800 731 757
aussales@wedgelock.com

www.wedgelock.com